



GP series

GP 6120 6V 12AH




Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

Design for Standby Power Applications

| | |
|--|---|
| <p>【Design Life】 Up to 5 Years in Standby Service at 25°C Eurobat (20°C) : 3-5 years, Standard Commercial</p> <p>【Operating Temperature Range】 Nominal Operating Temperature : 25°C (77°F) Discharge : -15°C ~ 50°C (5°F~122°F) Charge : -15°C ~ 40°C (5°F~104°F) Storage : -15°C ~ 40°C (5°F~104°F)</p> | <p>【Float Charging Voltage】 6.75 ~ 6.90 VDC/Unit at 25°C (77°F)</p> <p>【Equalization Charging Voltage】 7.2 ~ 7.5 VDC/Unit at 25°C (77°F)</p> <p>【Self Discharge】 Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).</p> |
|--|---|

| Specification | | Design according with IEC 61056-1/2: 2012 | |
|---------------------------|---|---|----------------|
| Nominal Voltage | 6V (3 cells per unit) | | |
| Nominal Capacity | 12 Ah @20hr-rate to 1.75V per cell @25°C (77°F) | | |
| Weight | Approx. 1.85 Kg (4.08 lbs) | | |
| Maximum Discharge Current | 150/180A (5sec) | | |
| Internal Resistance | Approx. 8.9mΩ | | |
| Short Circuit Current | | | |
| Maximum Charge Current | 3.60A | | |
| Terminal types | F1/F2 terminal -Faston Tab 187/250 | | |
| Terminal Breaking Torque | -- | | |
| Container Material | ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request | | |
| Dimensions | Length (L) | 151.0±2.0 mm | 5.94±0.08 inch |
| | Width (W) | 50.0±1.0 mm | 1.97±0.04 inch |
| | Container Height (h) | 94.3±1.0 mm | 3.71±0.04 inch |
| | Overall Height (H) | 100.5±1.5 mm | 3.96±0.06 inch |

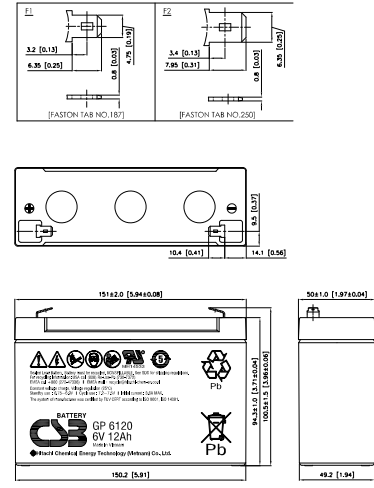

| Constant Current Discharge Characteristics Unit: A (25°C, 77°F) | | | | | | | | | | | | |
|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|
| F.V/Time | 5 MIN | 10MIN | 15MIN | 30MIN | 60MIN | 90MIN | 2HR | 3HR | 5HR | 8HR | 10HR | 20HR |
| 1.60V | 51.2 | 33.2 | 23.9 | 13.9 | 8.14 | 5.90 | 4.69 | 3.37 | 2.24 | 1.45 | 1.19 | 0.64 |
| 1.67V | 48.2 | 32.0 | 23.6 | 13.7 | 8.12 | 5.84 | 4.62 | 3.35 | 2.21 | 1.44 | 1.18 | 0.62 |
| 1.70V | 46.3 | 31.6 | 23.3 | 13.6 | 8.08 | 5.82 | 4.61 | 3.32 | 2.18 | 1.43 | 1.17 | 0.61 |
| 1.75V | 43.3 | 30.0 | 22.6 | 13.4 | 8.03 | 5.77 | 4.57 | 3.26 | 2.13 | 1.40 | 1.15 | 0.60 |
| 1.80V | 38.8 | 28.0 | 21.5 | 13.0 | 7.81 | 5.64 | 4.48 | 3.17 | 2.06 | 1.37 | 1.14 | 0.58 |
| 1.85V | 34.2 | 25.3 | 19.8 | 12.3 | 7.51 | 5.41 | 4.29 | 3.03 | 1.97 | 1.32 | 1.09 | 0.57 |

| Constant Power Discharge Characteristics Unit: W (25°C, 77°F) | | | | | | | | | | | | |
|---|------|-------|-------|-------|-------|-------|------|------|------|------|------|------|
| F.V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 60MIN | 90MIN | 2HR | 3HR | 5HR | 8HR | 10HR | 20HR |
| 1.60V | 269 | 173 | 134 | 79.8 | 48.9 | 35.3 | 28.0 | 19.8 | 12.7 | 8.36 | 6.91 | 3.85 |
| 1.67V | 257 | 171 | 132 | 79.6 | 48.8 | 35.1 | 27.8 | 19.7 | 12.6 | 8.30 | 6.85 | 3.81 |
| 1.70V | 250 | 168 | 131 | 78.8 | 48.5 | 35.0 | 27.7 | 19.5 | 12.5 | 8.25 | 6.80 | 3.80 |
| 1.75V | 231 | 163 | 128 | 78.1 | 48.1 | 34.6 | 27.5 | 19.3 | 12.2 | 8.12 | 6.69 | 3.77 |
| 1.80V | 209 | 153 | 121 | 76.3 | 47.4 | 34.0 | 26.8 | 18.9 | 12.0 | 7.91 | 6.52 | 3.71 |
| 1.85V | 185 | 140 | 111 | 72.2 | 45.8 | 33.1 | 26.3 | 18.1 | 11.7 | 7.73 | 6.36 | 3.61 |

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com Issued: 180205

Sales Offices
日立化成能源科技股份有限公司
 Hitachi Chemical Energy Technology Co., Ltd.

Recognized under UL 1989,
and certified by ISO 9001, 14001.

BUSINESS HEADQUARTERS
 Tel: +886-2-2880-5600
 Fax: +866-2-2888-3300

USA OFFICE
 Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
 Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)
 Tel: +86-755-8831-6488, 8831-6775
 Fax: +86-755-8831-6075

EUROPE (EMEA) OFFICE
 Tel: +31(0)180-418-140
 Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)
 Tel: +86-21-5046-1622, 5046-0833
 Fax: +86-21-5046-1046

TAIPEI OFFICE
 Tel: +886-2-2880-5600
 Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)
 Tel: +86-10-5820-5336, 5820-5338
 Fax: +86-10-5820-3053