

SRT11

6 kVA~ 10kVA
PF 1



Features

- Advanced DSP and 3-level technology
- Output power factor 1.0
- Active power factor correction (APFC) , input power factor up to 0.99
- High efficiency %95 (up to %98 in ECO mode)
- Advanced digital parallel technology
- Wide input voltage range (110-288 Vac) and frequency range (40-70 Hz)
- 50/60 Hz frequency auto sensing
- Two modes of frequency conversion: 50 Hz input/60 Hz output or 60 Hz input/50 Hz output
- Hot-swappable battery
- Flexible battery configuration (settable 16-20 pcs batteries)
- Digitally controlled charger
- High charging current available (Max. 12 A)
- Charging voltage and current configured by demands
- Linear derating in low voltage input reducing battery discharging times, extending the service life of battery
- Intelligent battery management, automatic floating /equalizing charge control, charger dormancy control, increasing battery life by 50%
- Ability to switch on the UPS with batteries
- Settable delayed start time when mains power is restored, reducing the impact on power grid or generator
- Fan speed varies intelligently with temperature, reducing noise and extending its service life
- Equipped with self-aging function
- Compact internal layout, miniaturized the complete unit for small footprint
- LCD+LED display, multi-functional keys operation, friendly human-machine interface
- Powerful background software for parameters configuration
- Advanced multi-platform communications: RS232,USB, RS485,SNMP and dry contacts communication interfaces
- Effective software and hardware protection function bust self-diagnostic function,robust abundant event log for check

Available Options

- RS232 and smart card slot included
- Optional parallel function battery temperature compensation,SNMP card, USB, RS485 card, dry contacts, EMD and SMS alarms

Rear Panel


1. SNMP (optional)
2. Fans
3. Parallel (optional)
4. RS232
5. EPO
6. USB (optional)
7. Temperature Compensation (optional)
8. GND
9. Bypass Breaker
10. Terminal and Cover
11. Battery Pack



Display panel can be rotated



6/10KVA(H)

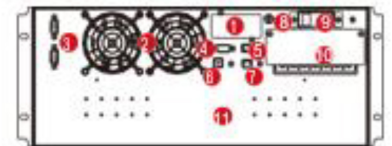

6/10KVA(S)



Easy for maintenance, hot-swappable battery

Specifications

MODEL	SRT11 6 Kva	SRT11 10 Kva
Capacity	6 Kva/6 kW	10 Kva/10 kW
INPUT		
Input wiring	Single-phase three-wire (1 ϕ +N+PE)	
Rated voltage	208/220/230/240 Vac	
Voltage range	110 ~176 Vac (linear derating between 50% and 100% load),176~280 Vac (ne derating)	
Rated frequency	50/60 Hz (auto-sensing)	
Frequency range	40~70 Hz	
Power factor	≥ 0.99	
Bypass voltage range	-40%~+15%(settable)	
Total harmonic distortion	$\leq 5\%$	
OUTPUT		
Output wiring	Single-phase (L-N)	
Rated voltage	208(PF=0.9)/220/230/240 Vac	
Voltage regulation	$\pm 1\%$	
Frequency	Synchronized to bypass in mains mode 50/60 Hz ± 0.1 Hz in battery mode	
Waveform	Sinusoidal	
Power factor	1	
Total harmonic distortion (THDv)	$\leq 1\%$ (linear load); $\leq 4\%$ (non-linear load)	
Crest factor	03:01	
Overload	105% ~110% for 10 min. 110% ~125% for 1 m. , 126% ~150% for 30 s	
BATTERIES		
DC voltage	192 Vdc (192~240 Cdc settable)	
Number of battery	16 pcs (16-20 settable)	
Inbuilt battery	12 V/7 Ahx16	12 V/ 9 Ahx16
Charging current	Standart model : 1 A ; Long time model : 5 A (default), 1-5 settable, 12 A (optional)	
Recharger time	Standart model : 90% capacity restored in 8 hours; Long time model : depend on the capacity of battery	
SYSTEM		
Efficiency	$\geq 94\%$ at 100% load, max. 94.5% at 60% load , $\geq 98\%$ in ECO mode	
Transfer time	0 ms	
Protections	Short-circuit,overload,overtemperature,battery low voltage, overvoltage,undervoltage and fan failure	
Max. Number of parallel connections	4	
Communications	RS232 (standard) , USB/RS485/dry contacts /SNMP/battery temperature compensation (optional)	
Display	LCD + LED	
OTHERS		
Operating temperature	0°C-40°C	
Storage temperature	-25°C-55°C (without batteries)	
Relative humidity	0 ~95%(non-condensing)	
Altitude	≤ 1000 m. Derating 1% for each additional 100 m	
IP rating	IP 20	
Noise level at 1m	≤ 55 dB	≤ 58 dB
Dimension (Wx D x H) mm	440 x 660x 176 (S)	440x580x 88 (H)
Packaged dimension(Wx D x H) mm	554x792x 418 (S)	514x696x168 (H)
Net weight (kg)	58 (S) , 12 (H)	63 (S), 14 (H)
Gross weight (kg)	68 (S) , 14 (H)	73 (S) , 16 (H)

- S means standard model ; H means long time model.
- All specifications are subject to change without notice.