



Specifications

Nominal Voltage		12 V
Rated capacity(10HR)		40Ah
Dimension	Length	197±2mm (7.76inch)
	Width	165±2mm (6.50inch)
	Height	170±2mm (6.69inch)
	Total Height	170±2mm (6.69inch)
Approx. Weight		12.5kg (27.6lbs)±4%

Dimensions

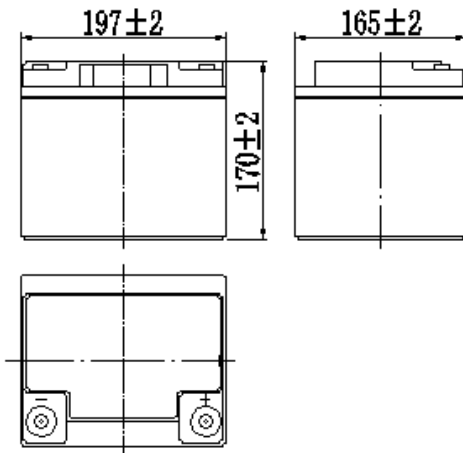

Terminal



Characteristics

Capacity (25°C)	10HR(10.8V)	40 Ah
	3HR(10.8V)	30Ah
	1HR(10.5V)	22Ah
Terminal type		T14
Internal resistance (Fully charged, 25°C)		Approx. 9mΩ
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C±3°C(77°F±5°F)
Operating temperature range	Discharge	-15°C~50°C(5°F~122°F)
	Charge	-10°C~50°C(14°F~122°F)
	Storage	-20°C~50°C(-4°F~122°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 15.00V Temperature compensation: -30mV/°C
Maximum charging current		12A
Terminal material		Copper
Maximum discharge current		400A(5 sec.)
Designed floating life(20°C)		10 years

Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

Constant Current Discharge Characteristics (A, 25°C)


F.V/TIME	5min	10min	15min	30min	60min	3h	4h	5h	8h	10h	20h
9.60V	120.0	87.2	67.2	40.2	24.7	10.5	8.40	7.18	4.94	4.07	2.16
9.90V	114.7	84.6	65.6	39.4	24.3	10.5	8.36	7.14	4.91	4.06	2.15
10.2V	105.2	81.1	63.2	38.2	23.7	10.4	8.30	7.09	4.87	4.05	2.15
10.5V	94.4	77.6	61.0	37.3	23.0	10.3	8.24	7.04	4.84	4.03	2.13
10.8V	81.0	73.2	57.8	35.9	22.2	10.0	7.99	6.83	4.69	4.00	2.12

Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	5min	10min	15min	30min	60min	3h	4h	5h	8h	10h	20h
9.60V	1312	942	767	451	282	124	98.8	84.9	58.6	48.6	25.9
9.90V	1270	914	749	442	278	123	98.3	84.4	58.3	48.5	25.8
10.2V	1215	876	722	428	271	122	97.6	83.8	57.9	48.4	25.8
10.5V	1110	838	697	418	262	121	96.9	83.2	57.5	48.1	25.6
10.8V	990	791	660	403	254	118	94.0	80.7	55.8	47.8	25.4

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Discharge Characteristics(25°C)

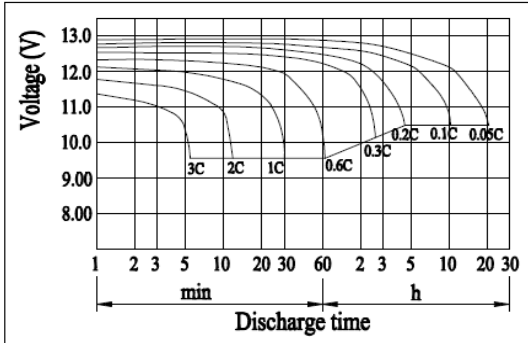


Charging Characteristics(25°C)

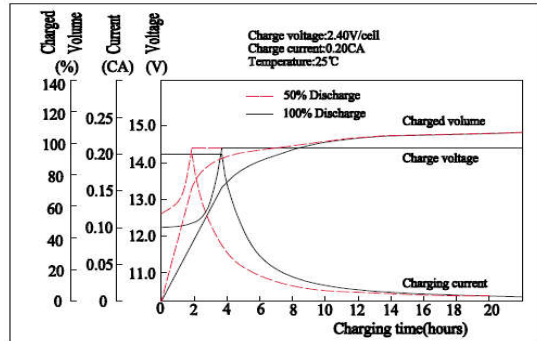


Effect of Temperature on Capacity

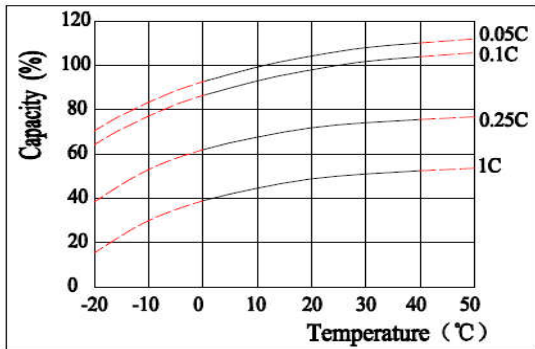


Self-discharge Characteristics

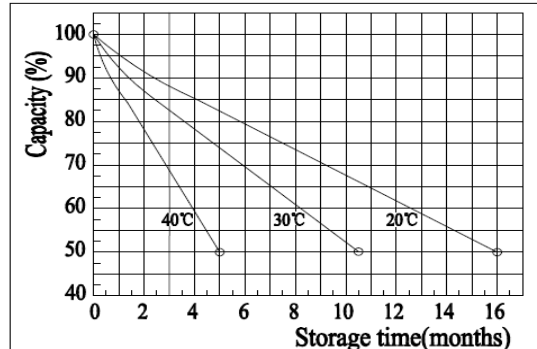


Floating Life on Temperature

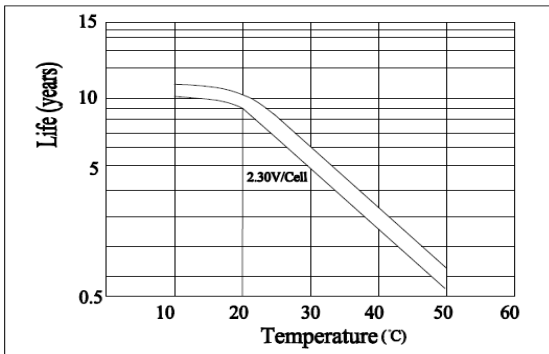

Cycle Life on D.O.D(25°C)

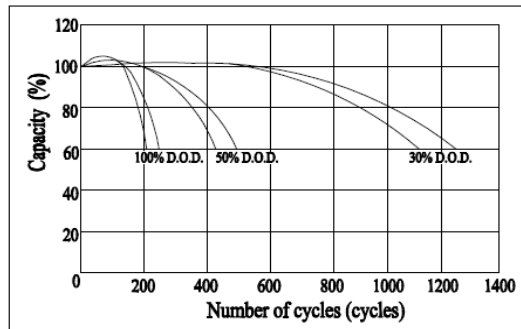

The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

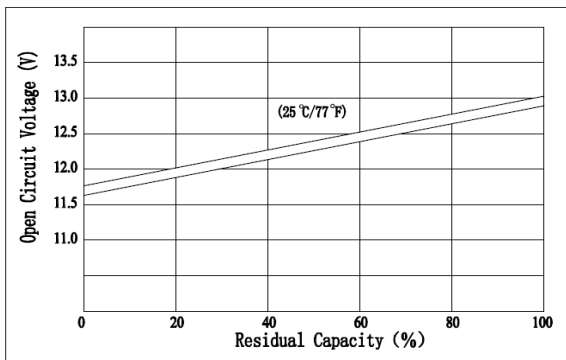

The Relationship for Charging Voltage and Temperature

